

a vault of solutions

**Work & Head Office**
Fluidomat Limited

7C-8J, IS Gajra Industrial Area-1,
A.B. Road, Dewas - 455 001 (MP) INDIA
Phone : 7272 - 268100
Fax: 7272-258581
Email: info@fluidomat.com
Web: www.fluidomat.com

Registered Office
Fluidomat Limited

117, 1st Floor, Navneet Darshan,
16/2 Old Palasia,
Indore - 452018 INDIA
Phone: 0731-2564820

Sales Offices

- Kolkata
- Chennai
- Mumbai
- Delhi

Product Dossier :
Constant Fill Fixed Speed
Fluid Coupling

supporting sectors

Top choice of Industry in different sectors.

Fluidomat manufactures wide range of Fixed Speed, Discharge Nozzle type and Scoop Control Variable Speed Fluid Couplings serving various Sectors and Plants of industries including: Power, Cement, Paper, Fertilizer and Chemical, Petroleum and Offshore drilling rigs, Steel, Metal, Mining, Mineral Processing and harbor Handling (Port Trust) etc.

vision & mission

Fluidomat with its world class products and services since over 5 decades aspire to continues with state of art products backed by continuous R & D, innovation and modern technology.

We will continue to supply world class products and services around the Globe with highest quality standards and provide drive solution to various Industries.

We will ensure product reliability, customer satisfaction and partnership with champions in various sector of industry to rely on our technology, product and services.

The product range

Fluidomat offers a wide range of sizes and executions of fluid couplings to meet customer requirements.

Type: Hollow Shaft Mounted execution: Type SM, SMD delay fill, SMDX extra-long delay fill, SMDX-AR Annular Ring type.

Type: Radially Displaceable execution: Type HF, HFD, HFDX & HFDX-AR Annular Ring type.

Type: T12 radially displaceable execution: These couplings are offered without delay fill chamber.

Type: CBSF/WF: Steel body couplings with and without delay fill chamber:

- In hollow shaft execution - oil filled/water filled.
- In radially displaceable execution - oil filled/water filled.

Type: SM & HFAQ with and without delay fill execution: they are aluminium body water filled fluid couplings.

Type: SMP & Alfa P execution: They are V belt & flat belt pulley type execution with and without delay fill chamber.

The above executions provide a wide range of adjustable starting torque simply by adjusting oil/water filling. Generally they are suitable for three consecutive starts from cold and 2 starts from hot. Wide choice of fusible plugs provided including 130°C, 140°C and 160°C with tolerance of $\pm 5^\circ\text{C}$.

Constant Fill Fixed Speed Coupling

Mechanical Thermal tripping device MTP and contactless tripping device - IRNC: are also provided as option to trip the drive before operation of fusible plug thus avoiding spray of hazardous hot oil /water and at the same time save drive and fluid coupling from getting damaged

Characteristics & Advantages: Fluidomat fluid coupling have centrifugal characteristic and power/torque transmission is by virtue of fluid filled in it. There is no mechanical connection between input and output side. Speed difference (slip) between input and output is an essential characteristic of fluid coupling.

These characteristics offer several advantages in the power transmission with drive system. A few are:

- No load startup of drive motor and controlled acceleration of driven machine.
- Absorption of shock loads and peak torque thus relieving drive train from shock loads and thus drive train life is greatly enhanced.
- Isolation of heavy inertia of driven machine enabling quick start and acceleration of drive motor.
- Drive train service factor improved.
- Synchronization of drives in multi drive machines.

- Controlled starting torque in range of 100% to 270% depending on type.

Fluidomat Profile in brief:

- Manufacturing fluid couplings with indigenous technology since 1971.
- Manufacturing Plant and Head office at Dewas, M.P, India with shed area of approx. 9500 Sq. Mtr. Modern Plant & Machinery with product testing facility.
- Continuous product improvement and R&D . New types and sizes of fluid couplings added regularly.


- Strong and healthy interaction with clients and solving drive problems regularly with strong application engineering expertise.
- Strong dedicated team of employees with strong engineering capabilities.
- More than 600 satisfied clients spread all over the world including India.



INDUSTRY	Power Plants	Sponge Iron & Steel	Metal	Cement & Paper	Fertilizer Chemicals & Petro chemical	Ore & Coal Mining, Washeries	Harbour Handling	Others
APPLICATION								
Ball and Rod Mills		 	 	 	 			
Bucket Elevators								
Car & Wagon Tipplers								
Centrifuges of Various Types								
Clinker Grinders								
Construction Machinery								
Conveyor of Various Types	 	 	 	 	 	 	 	 
Rope ways								
Cranes								
Crushers & Pulverisers	 	 	 	 	 			
Desolventiser and Toaster								
Extruders, Soap Plodders & Cutters								
Pumps of various types	 	 	 	 	 			 
Fork Lifts								
ID - FD Fans & Blowers	 	 	 	 	 			 
Ladle Cars								
Mining Machinery								
Mixers & Grinders of Various types								
Bucket Wheel Excavators & Scrapper								
Stacker cum Reclaimer								
Vibrating Screens								
Wire Drawing, Stranding & cabling								

 Constant Speed Coupling
 Scoop Control/Variable Speed Coupling

Index

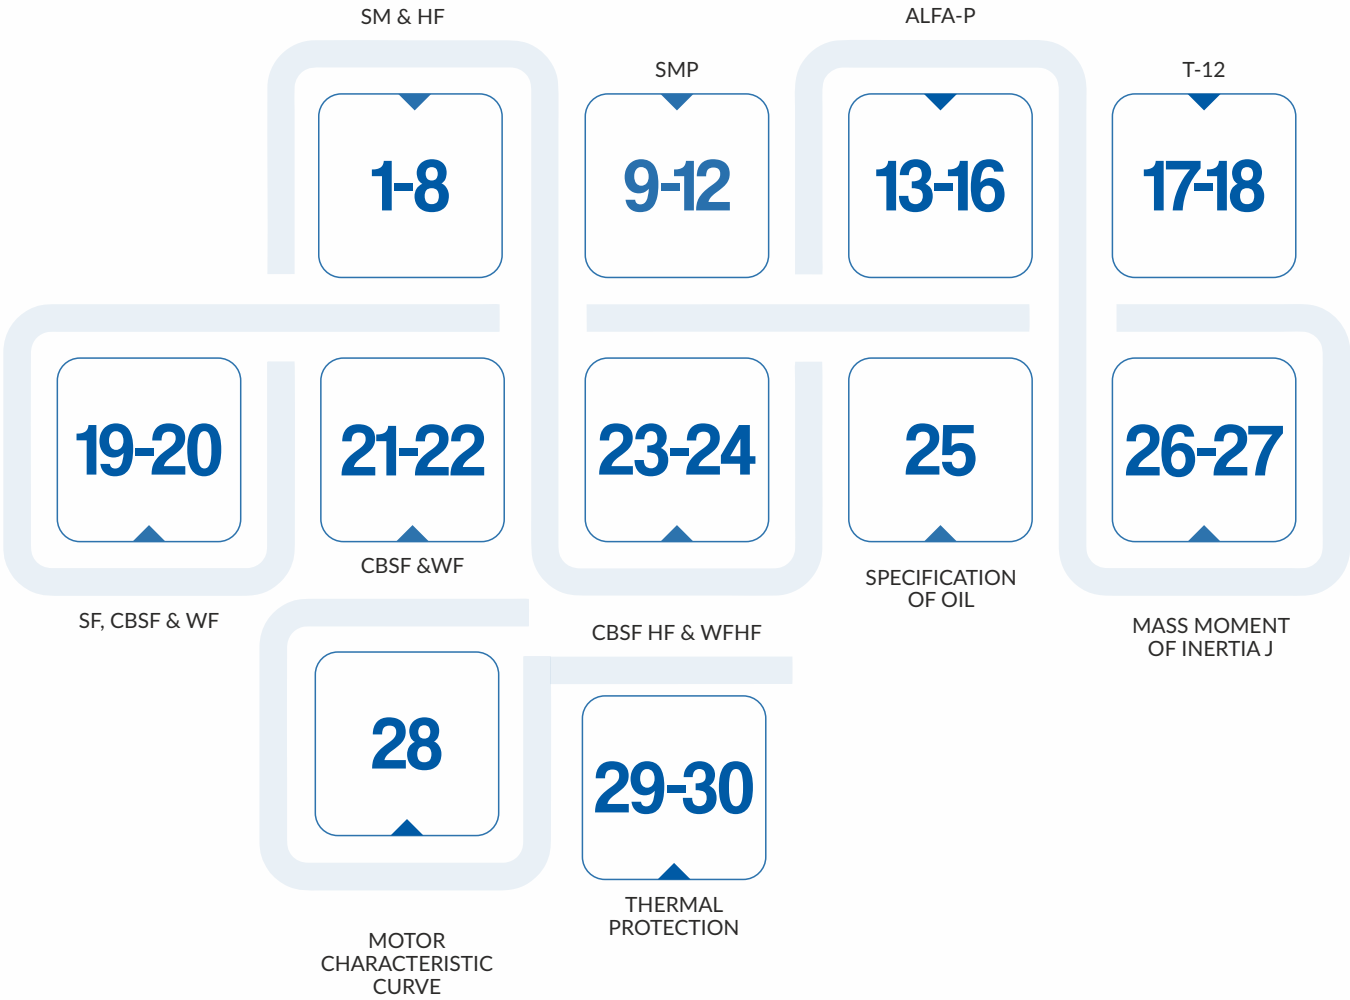


**Shaft Mounted
SM/SMD/SM-DX**

These are shaft mounted coupling enabling axially compact drive space. Rubber coupling on one end.




Radially Displaceable HF /HFD /HF-DX

These are radially displaceable coupling enabling prealignment of driving and driven shafts. Metallic disc flexible coupling on both ends. Weight of coupling shared by driving and driven shafts.

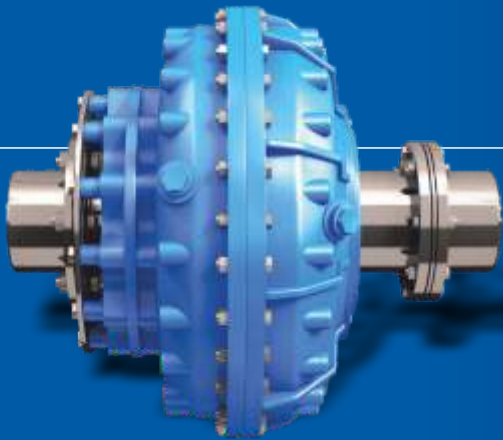


**Different Executions
of Oil Circuit**

TYPE SM




without delay fill chamber

TYPE SMD




with delay fill chamber

TYPE SM-DX




with extended delay fill chamber


STAND STILL



STARTING




RUNNING



**Oil Circuit and Oil Levels
with Delayfil Chamber**

- To satisfy starting and running characteristics of industrial machines Fluidomat offer three circuit types to give starting torque down to 120% of nominal torque.
- Type SM and HF are basic coupling without delay fill chamber. Starting torque adjustable in the range of 180% to 275%.
- Type SMD and HFD are couplings with delay fill chamber. Starting torque adjustable in the range of 150% to 275%.
- Type SM-DX and HF-DX are couplings with extended delay fill chamber. Starting torque adjustable in the range of 120% to 270%.
- Normal operating slip - 2% to 5% depending on coupling size and starting torque value.
- Fusible plug blow off temperature 130°C as standard. Optional 160°C.
- Suitable for two consecutive starts from hot and three from cold.

**Starting Torque Characteristics
With & Without Delay fill Chamber**

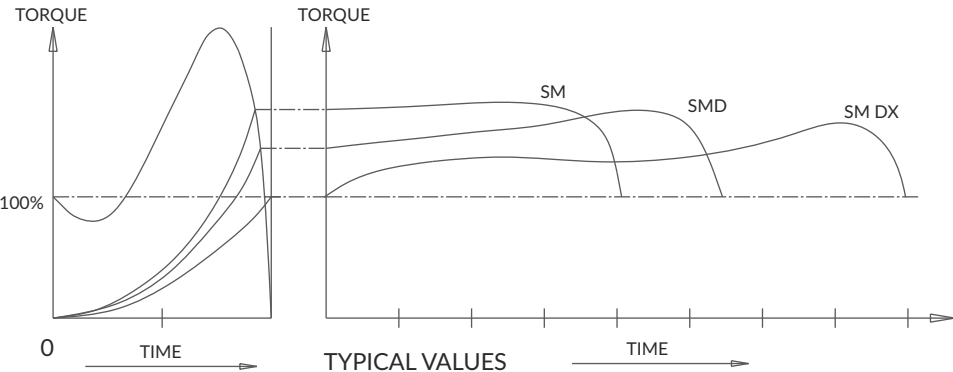

RATING TABLE


COUPLING MODEL		Maximum Ratings in KW at Different Input Speeds RPM.								
SM/SMD/SM-DX HF/HFD/HF-DX	500 RPM	600 RPM	750 RPM	900 RPM	1000 RPM	1200 RPM	1500 RPM	1800 RPM	*3000 RPM	*3600 RPM
1	--	--	0.5	0.9	1.2	2.2	4	7.5	20	26
2	--	--	0.9	1.7	2.2	4.1	7.5	13.7	30	36
3	--	--	1.3	2.4	3	6	11	18	38	45
4	--	1	2	4	5	9	16.5	22	45	--
5	--	2	4	7	9	16.3	30	42	70	--
6	--	3	5	9	11	22	40	60	110	--
7	--	4	8	15	18	34	62	85	140	--
8	--	6	10	18	23	44	80	120	--	--
8B	5	9	16	29	36	68	125	180	--	--
9	7	12	22	41	52	98	172	246	--	--
9B	9	16	29	54	68	129	228	300	--	--
10	13	22	39	73	91	172	275	370	--	--
10B	18	32	57	107	134	253	373	500	--	--
11	27	47	85	158	198	374	525	775	--	--
12	47	82	148	278	348	600	750	1000	--	--
13	95	163	293	550	620	850	1100	--	--	--
880	130	225	400	700	810	1150	1550	--	--	--
14	160	277	500	758	850	1250	--	--	--	--
15	275	472	850	1148	1250	--	--	--	--	--
16	340	583	1050	1400	1500	--	--	--	--	--
16DC	520	900	1500	1862	2000	--	--	--	--	--
1330	720	1250	2450	2500	--	--	--	--	--	--

*Coupling for 3000 & 3600 RPM should be selected only after our approval is obtained.



Coupling types SM/SMD/SM-DX are supplied in finished bores on the fluid coupling shaft. However where it is not possible to specify finished bores at the time of ordering, we can provide a separate shaft bush.

The allowable maximum bore in the shaft bush is denoted by Ød5 shown in the dimension table.

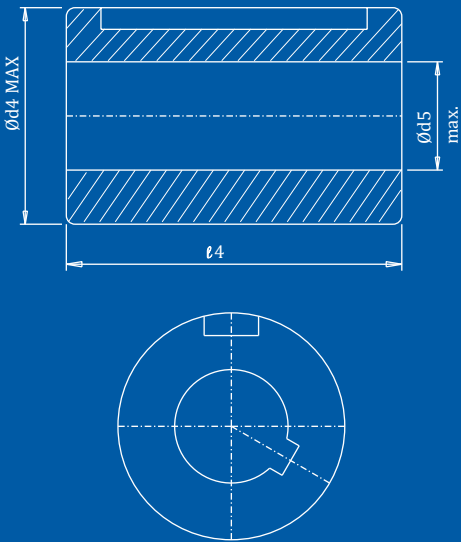


Technical Specification and
Dimension Table for SM,SMD,SM-DX couplings

SM SMD SM-DX	ØA	B			Ød4 max.	Ød5 max.	l4 max.	*Dry Weight Kg.			Max. Oil Filling Litres			Threads 'M' For Coupling Withdrawl	Connected Flexible Coupling Model
		SM	SMD	SMD-DX				SM	SMD	SMD-DX	SM	SMD	SMDX		
1	295	147	--	--	38	--	86	24	--	--	1.9	--	--	3/4" BSW	FFX-1
2	328	153	--	--	48	--	91	27	--	--	2.8	--	--	3/4" BSW	FFX-1
3	342	158	213	247	42	28	80	27	30	32	2.9	3.9	4.3	3/4" BSW	FFX-1
4	367	160	215	249	50	36	90	30	34	35	3.8	4.3	4.6	3/4" BSW	FFX-1
5	406	190	220	280	65	50	110	40	44	45	4.9	5.8	6.7	1" BSW	FFX-2
6	435	213	239	310	70	53	120	55	59	61	6.5	7.7	9.6	1" BSW	FFX-3
7	471	218	263	333	80	63	135	66	71	73	8	9.4	11.3	1" BSW	FFX-3
8	505	238	279	359	80	63	140	77	83	85	9.7	11.5	14.8	1" BSW	FFX-4
8 B	553	250	291	380	95	70	155	96	102	105	14	16.1	19.1	1 1/4" BSW	FFX-4
9	584	255	305	385	95	80	155	104	110	113	16.1	19.3	20.8	1 1/4" BSW	FFX-4
9 B	620	270	335	430	95	80	160	150	165	168	19.4	21.5	24.7	1 1/2" BSW	FP-1/FFX-5
10	644	280	329	424	110	85	170	170	180	185	25.1	28.1	33.9	1 1/2" BSW	FP-1/FFX-5
10 B	714	310	355	451	110	85	190	210	225	230	31.8	36.5	45.4	1 1/2" BSW	FP-2A
11	751	320	375	471	120	100	200	254	268	273	37.1	42.9	49	# Ø50-8P	FP-2A
12	845	369	445	565	130	110	240	310	345	355	51.0	65.6	71.5	# Ø50-8P	FP-2B
13	960	441	489	619	150	--	270	440	480	495	72.4	91.3	106.6	# Ø50-8P	FP-3
880	990	391	495	598	150	--	265	**	**	**	**	**	**	# Ø50-8P	FP-3
14	1104	451	494	624	160	--	275	682	730	745	114.7	131.9	153.9	# Ø65-16P	FP-4A
15	1230	485	594	742	175	--	275	850	920	940	147.6	181.4	193.1	# Ø75-16P	FP-4B
16	1298	559	668	798	205	--	320	--	1250	--	189.2	241.7	268.4	# Ø75-16P	**
16DC	1298	831	**	**	205	**	320	**	1800	**	**	**	**	# Ø75-16P	**
1330	1480	600	**	**	205	**	320	**	**	**	**	**	**	# Ø75-16P	**


The min bore Ød4 should be > withdrawal bolt dia M by atleast 3 mm.

* With Connected flexible Coupling. ** 16-Refer to us for Detail.

Square threads.

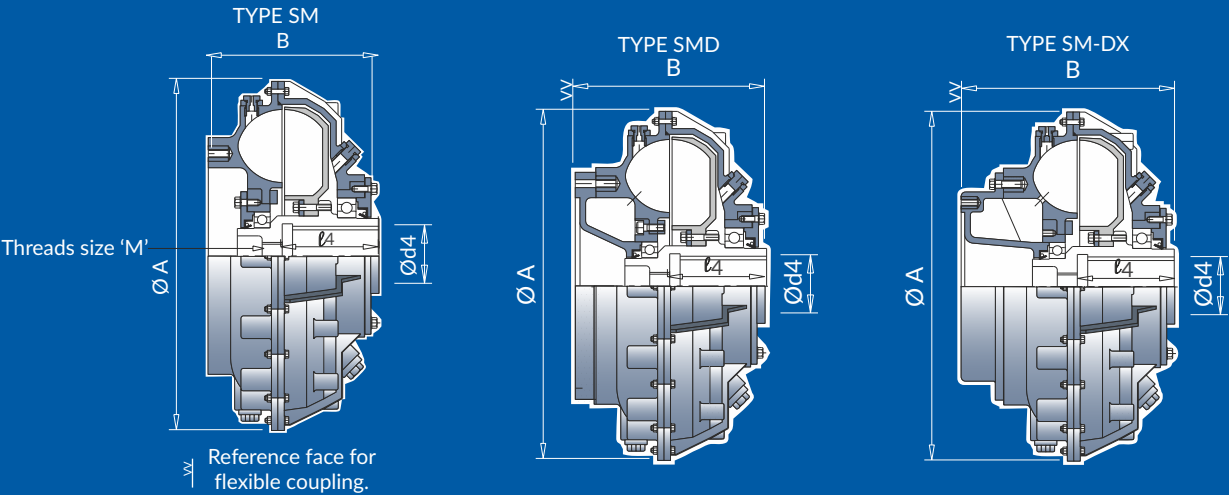

Flexible Coupling

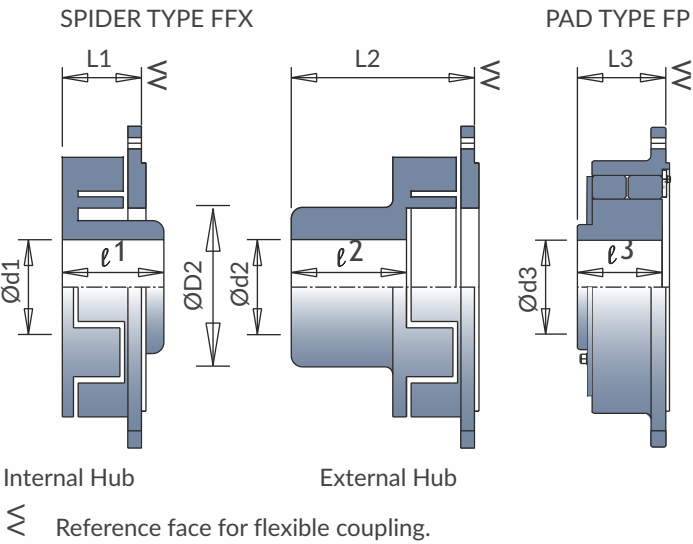

Connected Flexible Coupling Model Wise


Model SM- SMD- SM-DX	Internal Hub				External Hub			
	Ø d1 Max.	ØD1	l1	L1	Ø d2 Max.	ØD2 Max.	l2	L2
1,2,3,4	48	70	67	67	60	90	75	130
5	60	90	72	72	75	120	90	150
6,7	80	125	92	72	90	145	110	170
8, 8B,9	90	130	102	87	100	160	120	195
9B,10	140	185	106	106	125	210	150	230

Model SM- SMD- SM-DX	Pad Type Coupling		
	Ø d3 Max.	l3	L3
9B,10	105	110	120
10B,11	140	140	151
12	140	155	167
13	160	180	179
14	160	180	194
15,16	180	200	214

Technical Specification and Dimension Table for HF, HFD, HF-DX Couplings

Model HF, HFD, HF-DX	øA	B			ø d1 & ød4 max	l1 & l4	*Dry Weight Kg.			Max. Oil Filling In Litres			Connected Flexible Coupling Model
		HF	HFD	HF-DX			HF	HFD	HF-DX	HF	HFD	HF-DX	
3	342	239	295	329	55	70	25	28	29	2.9	3.9	4.3	FXC-I
4	367	264	320	354	60	70	34	37	39	3.8	4.3	4.6	FXC-II
5	406	285	315	375	60	70	48	51	54	4.9	5.8	6.7	FXC-II
6	435	332	358	429	75	95	64	67	70	6.5	7.7	9.6	FXC-III A
7	471	345	390	460	75	95	81	84	86	8	9.4	11.3	FXC-III A
8	505	366	407	487	95	95	96	102	107	9.7	11.5	14.8	FXC-III
8 B	553	405	446	537	95	110	116	122	127	14.5	16.1	19.1	FXC-III
9	584	395	445	526	95	110	124	130	135	16.1	19.3	20.8	FXC-III
9 B	620	446	511	589	120	125	168	180	184	19.4	21.5	24.7	FXC-IV A
10	644	468	517	611	120	125	172	184	188	25.1	28.1	33.9	FXC-IV A
10 B	714	491	537	632	120	125	217	233	237	31.8	36.5	45.4	FXC-IV A
11	751	513	568	663	125	125	281	292	300	37.1	42.9	49.0	MD 286
12	845	614	700	820	150	200	400	421	430	51.3	65.6	81.5	FXC-V
13	960	697	745	875	150	200	570	596	605	72.4	91.3	106.6	FXC-V
14	1104	772	815	945	225	200	640	688	703	114.7	131.9	153.9	MD 440
15	1230	777	886	1016	225	200	810	880	900	147.6	181.4	193.1	MD 440
16	1298	882	965	1095	225	200	1280	1320	1380	189.2	241.7	238.4	MD 440


* With Connected flexible Coupling.
Coupling for 3000 RPM should be selected only after our approval is obtained.

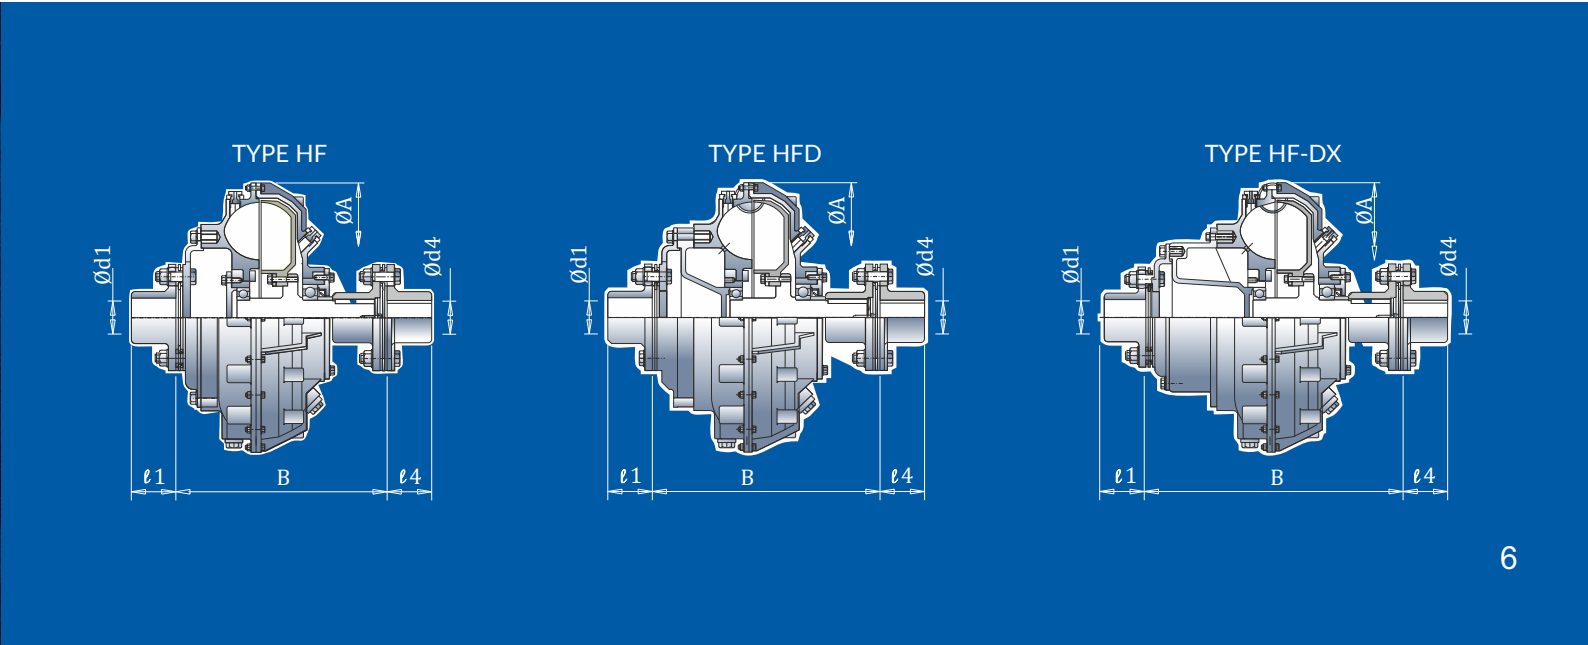


BRAKE DRUM MOUNTING
TYPE SM/SMD/SM-DX WITH BRAKE DRUM (Inner Wheel Drive)

Flexible Coupling Model	Spider Type Coupling				
	ØE	C	Z	ℓ2	L2
FFX-1	200	75	20	75	130
	250	95	0	75	130
FFX-2	250	95	20	90	150
	300	118	05	90	158
	315	118	05	90	158
FFX-3	300	118	17	110	170
	315	118	17	110	170
	400	150	05	110	190
FFX-4	300	118	42	120	195
	315	118	42	120	195
	400	150	10	120	195
	500	190	05	120	230
* FFX-5	400	150	29	150	230
	500	190	05	150	246

* For Fluid Coupling Model
SM/SMD/SM-DX -9B & 10

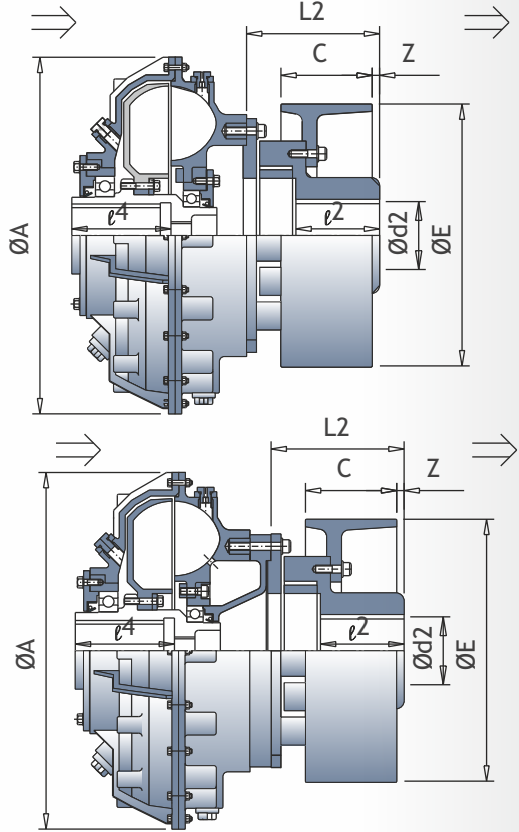


TYPE HF/HFD/HF-DX WITH BRAKE DRUM (Outer Wheel Drive)

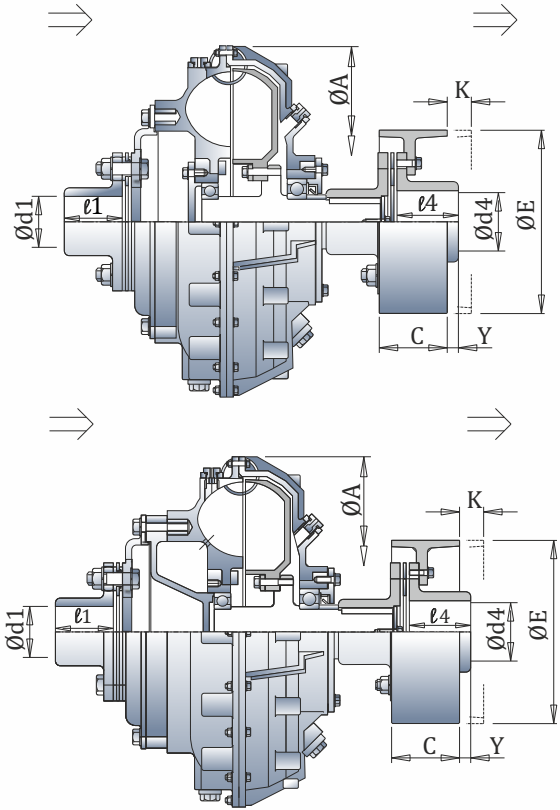

For radial displacement of Fluid Coupling the Brake drum shall need to be shifted by dimension 'K' As shown. The Machine/G.B. shaft length /space should be adequate for this shift of B.D.

Flexible Coupling Model	Metallic disc Coupling				
	ØE	C	Y	K* Min	Min. Bore
FXC-I	160 200	75 75	21 21	26 26	20
FXC-II	200 250	75 95	19 10	24 35	20
FXC-IIIA	250 300 315	95 118 118	35 32 32	35 55 55	20
	250 300 315 400	95 118 118 150	48 30 30 18	35 55 55 73	25
	300 315 400 500	118 118 150 190	52 52 40 05	55 55 65 70	32
MD 286	400 500 500	150 190 236	40 05 (-)31	65 70 80	38
FXC-V	500 600 630 710	190 236 236 265	70 34 34 25	70 70 70 90	50
	600 630 710	236 236 265	34 34 25	70 70 90	50

- SMP are fluid couplings for belt drive offering a wide range of pulley diameters.
- Have an in built delay fill chamber enabling quick decay of motor starting current.
- Suitable for two consecutive starts from hot and three from cold.
- Fusible plug blow off temp. is 130°C as standard. optional 160° C.
- Can be Mounted Horizontally or vertically Pulley up.

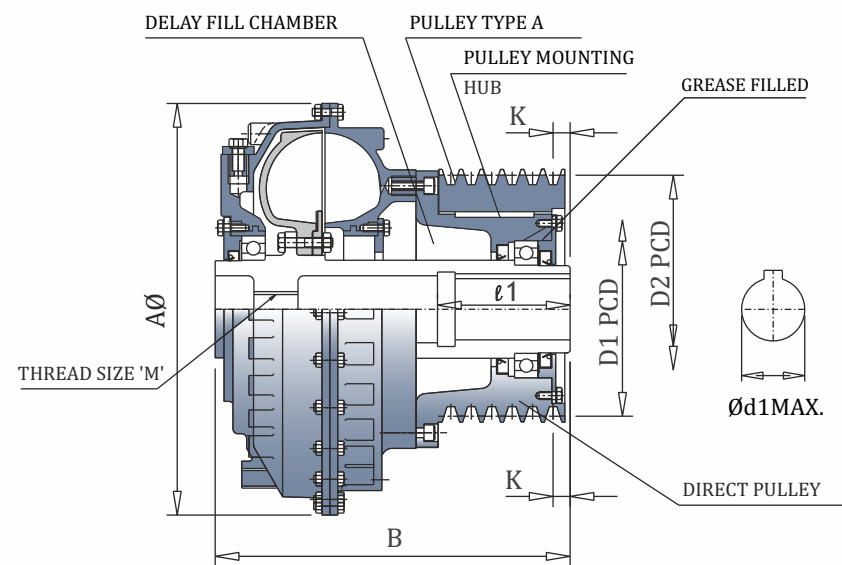

Rating Table

Technical Specification and Dimension Table For SMP

Coupling Model SMP	Max. Ratings In Kw At Different Input Speeds Rpm						Ø A	B	Ød1 max	ℓ 1	Dry* Wt. KG	Max. Oil Filling Litres	Threads M BSW
	750	900	1000	1200	1500	1800							
1R	0.6	1	1.5	2.5	5	8	280	200	38	91	18	2.2	3/4"
2R	0.9	1.6	2.2	3.8	7.5	12	310	205	38	91	25	2.8	3/4"
3R	1.2	2.1	3	5	10	15	330	262	42	110	30	3.3	3/4"
4R	2.3	4	5.5	9.5	18.5	25	360	284	42	110	35	4.1	3/4"
5R	4.1	7	10	17	30	38	395	331	65	142	46	6.5	1"
6R	5.6	10	13.3	23	45	60	420	374	65	142	65	8.3	1 ½"
7R	8.3	15	20	34.6	67.5	85	465	395	75	142	92	11.1	1 ½"
8R	11.2	19	26	46	90	120	505	430	85	142	115	14.6	1 ½"
8B-R	16.6	29	39.4	68	133	180	553	495	90	155	121	18	1 ½"
9R	19	33	45	78	152	200	570	512	90	170	127	22	1 ½"
10R	36	62	85	147	250	325	630	535	110	210	220	28.5	1 ¾"
11R	87	150	205	355	450	...	740	590	110	210	275	44.8	Ø50-8P Square Thread


*with max. pulley Dia in Direct Pulley Mounting.
The Min. bore Ød1 should be > withdrawal bolt dia. M by atleast 3mm.
Other groove sections can be provided on request.

Pulley Details

MODEL	PULLEY GROOVE 'SEC'	Direct Pulley Mounting				PULLEY GROOVE 'SEC'	Pulley Type-A			
		MAX. NO OF GROOVES	'D1' PCD		'K' ± 1.5		MAX. NO OF GROOVES	'D2' PCD		'K' ± 1.5
			MAX	MIN				MAX	MIN	
SMP-1R	SPA/A	3	260	140	22	SPA/A	3	260	160	17
	SPB/B	2	260	146	25	SPB/B	2	260	160	19
	SPC/C	1	260	156	30	SPC/C	1	260	175	22
SMP-2R	SPA/A	4	180	140	18	SPA/A	4	300	173	14
	SPB/B	3	180	147	20	SPB/B	3	300	180	15
	SPC/C	2	180	157	25	SPC/C	2	300	190	21
SMP-3R SMP-4R	SPB	3	160	145	26	A	5	260	160	18
	SPB	4	140	140	26	B	4	260	165	21
	B	4	140	140	26	C	3	260	170	25
	B	3	160	145	26	SPA	5	260	160	18
	C	2	140	140	30	SPB	4	260	165	21
	C	2	160	145	31	SPC	3	260	170	26
SMP-5R	B	5	180	175	23	—	—	—	—	—
	C	3	200	185	27	B	5	325	209	21
	C	4	185	180	27	C	4	325	215	25
	SPB	5	180	180	23	—	—	—	—	—
	SPC	3	200	195	27	SPB	5	325	213	21
	SPC	4	190	190	27	SPC	4	325	223	25
SMP-6R	B	6	200	175	34	B	6	350	220	22
	B	6	225	210	32	C	5	350	225	27
	C	5	200	180	32	SPB	6	350	222	22
	C	5	225	215	30	SPC	5	350	232	27
	SPB	6	200	180	34	—	—	—	—	—
	SPB	6	225	215	32	—	—	—	—	—
	SPC	5	200	190	32	—	—	—	—	—
	SPC	5	225	225	30	—	—	—	—	—

MODEL	PULLEY GROOVE 'SEC'	Direct Pulley Mounting				PULLEY GROOVE 'SEC'	Pulley Type-A			
		MAX. NO OF GROOVES	'D1' PCD		'K' ± 1.5		MAX. NO OF GROOVES	'D2' PCD		'K' ± 1.5
			MAX	MIN				MAX	MIN	
SMP-7R	B	6	200	195	26	B	6	380	224	26
	C	5	224	205	30	C	5	380	245	30
	C	5	200	200	30	SPB	6	380	245	26
	SPB	6	205	200	26	SPC	5	380	240	30
	SPC	5	225	215	30	—	—	—	—	—
SMP-8R	B	8	250	240	20	B	8	420	260	18
	B	8	235	225	20	C	6	420	265	22
	C	6	250	240	24	SPB	8	420	265	18
	C	6	235	230	24	SPC	6	420	275	22
	SPB	8	250	240	20	—	—	—	—	—
	SPB	8	235	230	20	—	—	—	—	—
	SPC	6	250	240	24	—	—	—	—	—
	SPC	6	235	235	24	—	—	—	—	—
SMP-8B-R & SMP-9R	B	10	250	235	28	B	10	500	260	25
	C	8	250	240	32	C	8	500	265	29
	SPB	10	250	240	28	SPB	10	500	265	25
	SPC	8	250	250	32	SPC	8	500	275	29
SMP-10R	SPB/B	12	350	285	27	SPB/B	12	500	335	19
	SPC/C	8	345	295	32	SPC/C	9	500	345	23
SMP-11R	SPB	11	359	300	28	SPB	11	500	360	17
	SPC	8	369	310	33	SPC	8	500	370	22
	B	11	350	292	28	B	11	500	352	17
	C	8	355	300	33	C	8	500	360	22

Groove sections - D, E, 3V, 5V & 8V can be provided on request

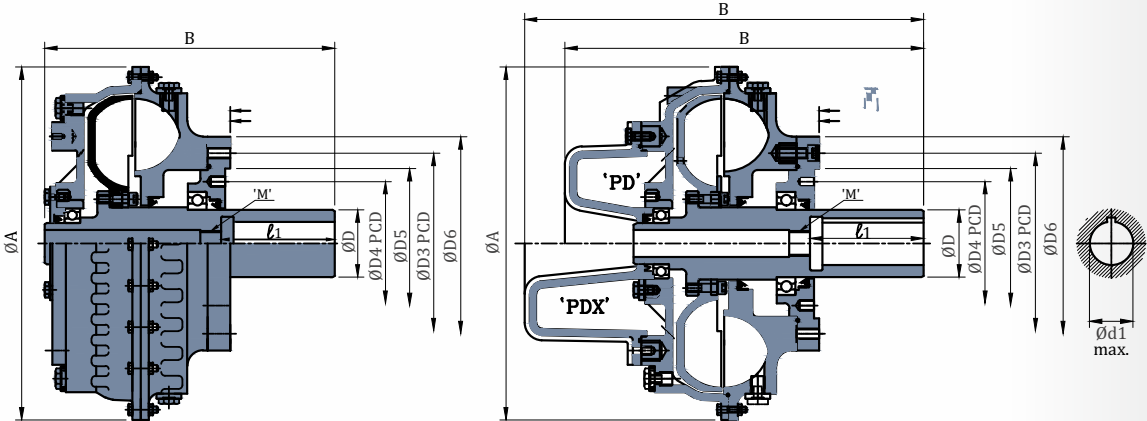

ALFA 'P'

ALFA 'PD/PDX'

Rating Table

"Coupling Model ALFA P / PD / PDX"	MAX rating in KW at different input speeds in RPM						
	600	730	900	970	1200	1470	1800
3	...	1.3	2.4	3	6	11	18
4	1	2	4	5	9	16.5	22
5	2	4	7	9	16.3	30	42
6	3	5	9	11	22	40	60
7	4	8	15	18	34	62	85

Alfa-P coupling are for Belt drive and are offered in different executions of with and without delay fill chamber. These couplings can be supplied without pulley and the pulley within specified range tabulated below, can be manufactured and installed by the buyer at his end. This provide flexibility for stocking and use of pulleys of different specification on the same coupling.

- Suitable for three consecutive starts two from hot and three from cold.
- Fusible plug blow off temperature 130°C as standard optional 160°C
- Oil to be used hydraulic Oil ISOVG32.

Technical Specification and Dimension Table For ALFA P, PD & PDX

"Coupling Model ALFA P / PD / PDX"	PCD		ØD	ØA	B			Ød1 Max	ℓ1	Dry Wt. in KG.			Max. Oil Filling in Litres			Threads "M" BSW
	D3	D4			P	PD	PDX			P	PD	PDX	P	PD	PDX	
3	175	120	65	342	289	351	390	42	110	24	27	28	2.8	3.2	3.2	3/4"
4	175	120	75	367	292	361	390	50	110	30	34	35	3.8	4.2	4.2	3/4"
5	215	140	90	406	356	413	463	65	142	40	44	45	4.9	5.4	5.4	1"
6	255	162	100	435	395	456	526	65	142	55	59	61	5.6	7.1	7.1	1"
7	255	162	110	471	405	464	534	75	142	66	71	73	8.3	8.8	8.8	1 1/2"

"Coupling Model ALFA P / PD / PDX"	Locating Dia. For Pulley		Pulley Mounting PCD		'R'			*N	*J	*M On Coupling
	Type-1,2 & 3 D5	Type-4 D6	D3	D4	Type 1 & 2	Type-3	Type-4			
3	145	207	175	120	4	5	5	8	10	M10
4	145	207	175	120	4	5	5	8	10	M10
5	180	255	215	140	5	7	5	8	10	M10
6	220	295	255	162	5	7	5	8	10	M10
7	220	295	255	162	5	7	5	8	10	M10


* 'N'- Number, 'J' - DIA DRILLED HOLES FPR 'M' - TAPPED HOLE IN COUPLING.

PULLEY TYPE - 1					
MODEL	SEC	"D" PCD		NO. OFF GROOVE	K1
		MIN Ø	MAX Ø		
ALFA P/PD/PDX 3 & 4	B	Ø115	Ø145	4	7.3
	C	Ø120	Ø140	3	5
	SPA	Ø115	Ø145	5	8.5
	SPB	Ø120	Ø145	4	7.3
	SPC	Ø130	Ø140	3	5
ALFA P/PD/PDX 5	B	Ø130	Ø180	6	10.6
	C	Ø140	Ø180	4	20.9
	SPA	Ø130	Ø180	7	19
	SPB	Ø135	Ø180	6	10.6
	SPC	Ø145	Ø180	4	20.9
ALFA P/PD/PDX 6 & 7	B	Ø150	Ø220	7	16.3
	C	Ø160	Ø220	5	20.6
	SPA	Ø150	Ø220	9	14.5
	SPB	Ø160	Ø220	7	16.3
	SPC	Ø170	Ø220	5	20.6


PULLEY TYPE - 2						
MODEL	SEC	"D" PCD		NO. OFF GROOVE	K1	K2
		MIN Ø	MAX Ø			
ALFA P/PD/PDX 3 & 4	B	Ø145	Ø172	2	15	33.5
	C	Ø140	Ø180	2	1	33.5
	SPA	Ø145	Ø172	3	9	33.5
	SPB	Ø140	Ø180	2	15	33.5
	SPC	Ø140	Ø140	2	1	33.5
	SPC	Ø140	Ø140	2	1	33.5
ALFA P/PD/PDX 5	B	Ø180	Ø200	4	18	39.0
	C	Ø180	Ø210	3	16.5	39.0
	SPA	Ø180	Ø200	5	4.5	39.0
	SPB	Ø180	Ø210	4	18	39.0
	SPC	Ø180	Ø220	3	16.5	39.0
	SPC	Ø180	Ø220	3	16.5	39.0
ALFA P/PD/PDX 6 & 7	B	-	-	-	-	
	C	-	-	-	-	
	SPA	-	-	-	-	
	SPB	-	-	-	-	
	SPC	-	-	-	-	

PULLEY TYPE - 3					
MODEL	SEC	"D" PCD		NO. OFF GROOVE	K1
		MIN Ø	MAX Ø		
ALFA P/PD/PDX 3 & 4	B	Ø172	Ø230	4	17.3
	C	Ø180	Ø235	3	15
	SPA	Ø172	Ø230	5	18.5
	SPB	Ø180	Ø235	4	17.3
	SPC	Ø190	Ø245	3	15
ALFA P/PD/PDX 5	B	Ø200	Ø270	7	5
	C	Ø210	Ø270	5	9.3
	SPA	Ø200	Ø270	8	18
	SPB	Ø210	Ø270	7	5
	SPC	Ø220	Ø270	5	9.3
ALFA P/PD/PDX 6 & 7	B	Ø225	Ø320	8	11.3
	C	Ø225	Ø320	6	9.15
	SPA	Ø225	Ø320	10	13.5
	SPB	Ø225	Ø320	8	11.3
	SPC	Ø235	Ø400	6	9.15


PULLEY TYPE - 4					
MODEL	SEC	"D" PCD		NO. OFF GROOVE	K1
		MIN Ø	MAX Ø		
ALFA P/PD/PDX 3 & 4	B	Ø235	Ø320	4	22
	C	Ø240	Ø320	3	20.6
	SPA	Ø235	Ø320	5	23.5
	SPB	Ø240	Ø320	4	22
	SPC	Ø250	Ø320	3	20.6
ALFA P/PD/PDX 5	B	Ø275	Ø350	7	10
	C	Ø285	Ø350	5	14.3
	SPA	Ø280	Ø350	8	23.3
	SPB	Ø285	Ø350	7	10
	SPC	Ø295	Ø350	5	14.3
ALFA P/PD/PDX 6 & 7	B	Ø325	Ø400	8	14.3
	C	Ø325	Ø400	6	16.3
	SPA	Ø325	Ø400	10	14.15
	SPB	Ø325	Ø400	8	16.3
	SPC	Ø335	Ø400	6	14.3

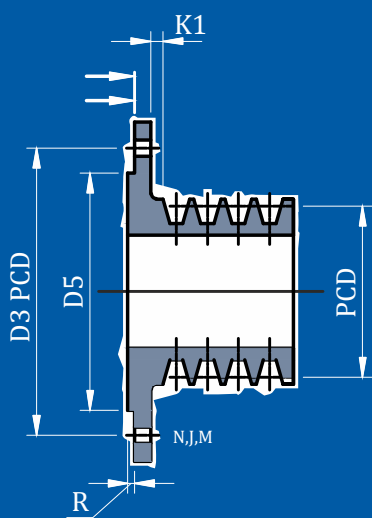


PULLEY TYPE-1

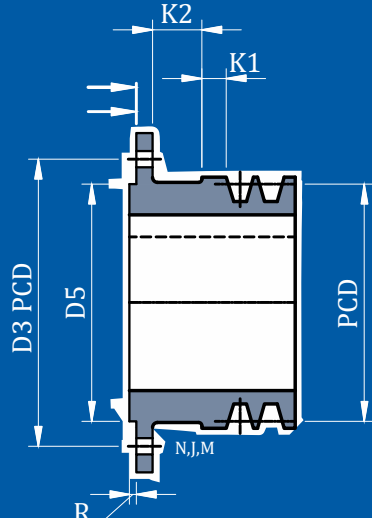

PULLEY TYPE-2

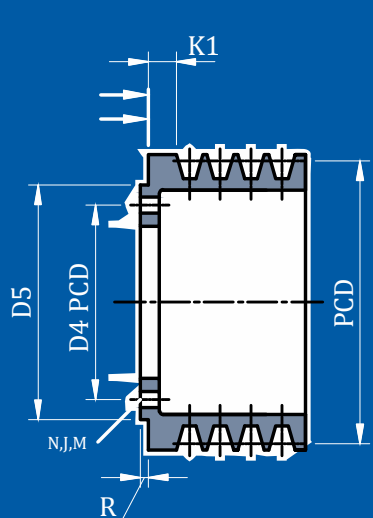

PULLEY TYPE-3

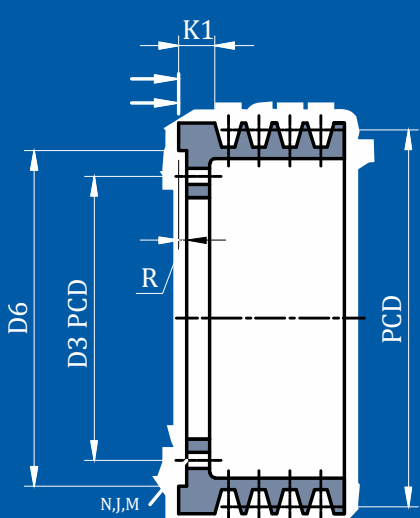

PULLEY TYPE-4

Rating Table

COUPLING MODEL T12-	KW ratings of couplings at different input speeds (RPM)		
	730 RPM	970 RPM	1470 RPM
01	0.6	1.4	5.0
02	0.9	2.1	7.5
03	1.1	2.6	9.3
04	1.8	4.3	15.0
05A	3.3	7.5	27.0
05	4.6	11.0	37.5
06	7.3	17.4	60.0
07	9.8	23.2	80.0
08	19.0	45.0	153.0
08B	28.3	65.0	228.0
09	37.0	90.0	265.0
010A	64.0	150.0	373.0
010	90.0	209.0	485.0
011	148.0	348.0	-
012	260.0	610.0	-
013	500.0	850.0*	-
014	850.0	1000.0*	-

* Coupling for these rating should be selected only after our approval is obtained.



- Starting torque adjustable in the range of 180-275%.
- Normal operating slip is 2 to 5% depending on coupling size and starting torque value.
- Suitable for two consecutive starts from hot and three from cold.
- Fusible plug blow off temperature is 130°C standard. Optional:160°C.
- These couplings are radially displaceable.



Technical Specification and Dimension Table For T12

Model T-12	ø A	B	ø d1 Maximum	ℓ1	ø d4 Maximum	ℓ4	Dry Weight KG.	Maximum Oil Filling In Litres	Connected Flexible Coupling Model
01	280	167	35	50	55	70	17	1.5	FXC-I
02	310	181	35	50	55	70	20	3	FXC-I
03	330	199	50	80	55	70	26	2.9	FXC-I
04	350	216	50	80	60	70	31	3.7	FXC-II
05A	395	237	50	80	60	70	48	5.1	FXC-II
05	420	276	75	110	75	95	67	5.9	FXC-III A
06	465	290	75	110	75	95	75	8.4	FXC-III A
07	510	314	75	110	95	95	85	11	FXC-III
08	570	347	120	140	95	110	138	15	FXC-III
08B	615	353	120	140	120	125	176	18.6	FXC-IV A
09	650	371	120	140	120	125	183	22.2	FXC-IV A
010A	700	368	120	140	120	125	198	26.3	FXC-IV A
010	750	414	120	140	125	125	234	33	MD 286
011	860	488	125	210	150	200	395	50	FXC-V
012	970	568	150	210	150	200	480	75	FXC-V
013	1104	594	150	210	220	200	598	108	MD 440
014	1230	655	175	210	220	200	995	160	MD 440

Type T12 With Brake Drum

Flexible Coupling Model	Metallic disc Coupling			
	ØE	C	Y	K* Min
FXC-I	160	75	21	26
	200	75	21	26
FXC-II	200	75	19	24
	250	95	10	35
FXC-III A	250	95	35	35
	300	118	32	55
FXC-III	315	118	32	55
	250	95	48	35
	300	118	30	55
	315	118	30	55
FXC-IV A	400	150	18	73
	300	118	52	55
	315	118	52	55
	400	150	40	65
MD 286	500	190	05	70
	400	150	40	65
	500	190	05	70
	600	236	(-)31	80
FXC-V	630	236	(-)31	80
	500	190	70	70
	600	236	34	70
	630	236	34	70
	710	265	25	90

*For radial displacement of Fluid Coupling the Brake drum shall need to be shifted by dimension 'K' As shown. The Machine/G.B. shaft length /space should be adequate for this shift of B.D.

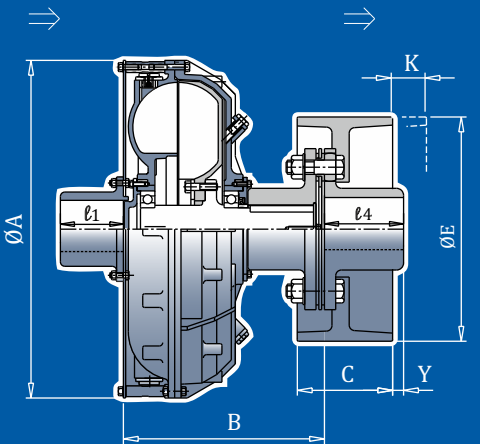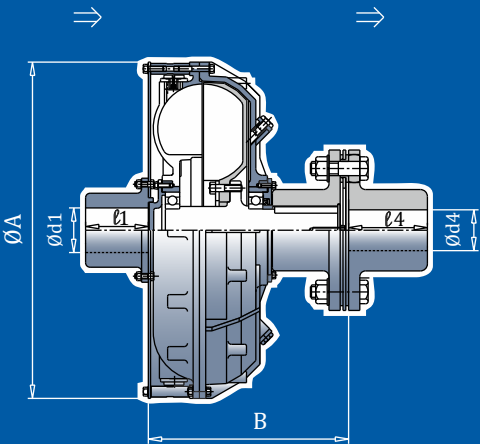

The Steel Body Constant Fill Fluid Couplings

Type SF: are steel body constant fill Traction Coupling with a thin driving plate on motor side and metallic disc coupling on machine side. These couplings are radially displaceable. Starting torque adjustable in range of 180% to 270%.

Type CBSF: are steel body constant fill fluid couplings with hollow shaft execution on one end and flexible coupling on the other end for respective shaft connections. They are available with delay fill chamber type CBSF DF & CBSF DX and without delay fill type CBSF. Also available in Radially Displaceable execution CBSF-HF having metallic disc flexible coupling on both ends.

They are suitable for operation with:

- Water – Oil emulsion as per HFB classification of European Mines safety commission.
- Mineral oil as operating fluid.
- Maximum starting torque transmitting capacity is adjustable between 180% to 270 % for CBSF and 150 to 270% CBSF DF delay fill couplings & 130% to

270% for CBSF DX Couplings with extended delay fill chamber.

Type WF: are steel body constant fill fluid couplings with hollow shaft execution on one end and flexible coupling on the other end for respective shaft connection. They are available with delay fill chamber type WFDF & WFDX with extended delay fill chamber and without delay fill type WF. Also available in Radially Displaceable execution having metallic disc flexible coupling on both ends.

They are suitable for operation with:

- Water (aqua)
- Water oil emulsion as per HFB classification of European Mines Safety Commission.
- Mineral Oil
- Maximum torque transmitting capacity is adjustable between 200% to 270% for type WF and 180% to 270% for WF DF & 130% to 270% of WFDX couplings.

These steel body fluid couplings are of extremely robust construction. They are ideal for use in underground or opencast mines or other sites where use of aluminum is prohibited or where robust construction is necessary with simplicity of construction.

They offer all the advantages and performance characteristics of any other aluminium body Fluidomat Fluid Couplings

- Virtually no load start & run up of motor and utilization of motor peak torque for load acceleration.
- Smooth and controlled acceleration of driven machine.
- Quick decay of motor starting current kick.
- Adjustable starting characteristics.
- Dampening of shock loads, torsional fluctuations and vibrations.



Rating Table



WF/WFHF and their D & DX Execution	SF/CBSF/ CBSFHF & their D & DX Execution							
Model	Model	600	750	900	1000	1200	1500	1800
WF 4	4	1	1.8	3	4	8	15	22
WF 360	6	2.6	5	9	12	20	40	60
WF 5	7	4	7.5	13	18	31	60	80
WF 6	8	5.6	11	19	26	45	80	114
WF 7	9	10	19	33	45	78	152	197
WF 8	10	14.4	28	48	66	115	224	290
WF 566	566*	20	40	68	93	161	315	375
WF 9	11*	33	64	111	152	262	373	500
WF 662	* 662	43	83	143	196	340	660	750

* models not offered in SF Execution

Technical Specification and Dimension Table for coupling type SF

Fluid Coupling Model SF	ØA	B	Ød 1 MAX	ℓ1	Ød 4 MAX	ℓ4	Flex. Coupling Model FXC	Dry Wt. Kg	Max filling Litres
4	375	250	50	80	60	70	II	55	4.8
6	418	267	75	110	75	95	IIIA	82	7.8
7	470	300	75	110	95	95	III	98	10.0
8	508	310	75	110	95	95	III	106	13.5
9	570	330	110	140	95	110	III	190	18.75
10	620	345	110	140	125	125	MD 286	205	27


INPUT TYPE SF OUTPUT

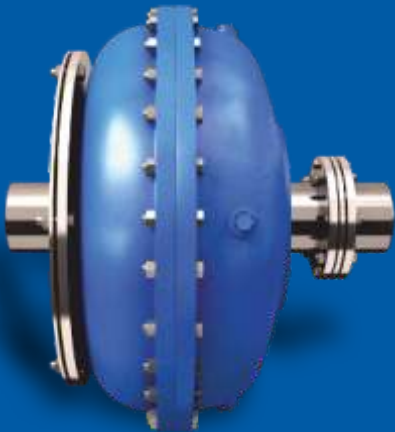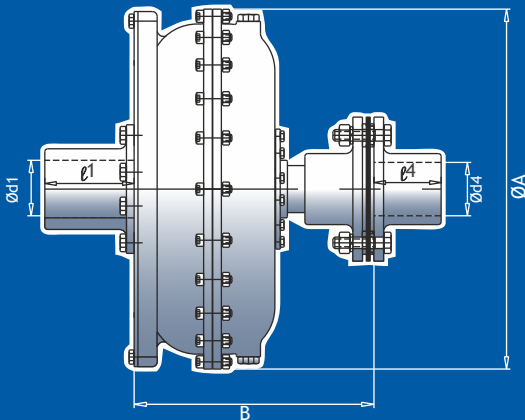


Technical Specification and Dimension Table For
CBSF, CBSF-DF,CBSF-DX


Model	ØA	B	Ø d4 max	ℓ4	Threads 'M' BSW	Flexible Coupling Model
WF-4, CBSF-4	375	154	42	74	1"	FFX-1
WF-360, CBSF-6	418	220	55	112	1"	FFX-3
WFDF-360, CBSFDF-6	418	315	55	112	1"	FFX-3
WF-5, CBSF-7	470	250	80	135	1"	FFX-3
WFDF-5, CBSFDF-7	470	320	80	135	1"	FFX-3
WF-6, CBSF-8	512	253	85	140	1½"	FFX-4
WFDF-6, CBSFDF-8	512	328	85	140	1½"	FFX-4
WFDF-6, CBSFDF-8	512	373	85	140	1½"	FFX-4
WF-7	570	277	95	155	1½"	FFX-4
WFDF-7	570	355	95	155	1½"	FFX-4
WFDF-7	570	377	95	155	1½"	FFX-4
CBSF-9	570	237	95	150	1½"	FFX-4
CBSFDF-9	570	315	95	150	1½"	FFX-4
CBSFDF-9	570	337	95	150	1½"	FFX-4
WF-8, CBSF-10	620	291	95	170	1½"	FP-1/FFX-5
WFDF-8, CBSFDF-10	620	370	95	170	1½"	FP-1/FFX-5
WFDF-8, CBSFDF-10	620	451	95	170	1½"	FP-1/FFX-5
WF-566, CBSF-566	644	313	110	172	1½"	FP-1/FFX-5
WFDF-566, CBSFDF-566	644	392	110	172	1½"	FP-1/FFX-5
WFDF-566, CBSFDF-566	644	473	110	172	1½"	FP-1/FFX-5
WF-9, CBSF-11	715	367	110	200	Φ50-8P *	FP-2A
WFDF-9, CBSFDF-11	715	425	110	200	Φ50-8P *	FP-2A
WFDF-9, CBSFDF-11	715	508	110	200	Φ50-8P *	FP-2A
WF-662, CBSF-662	760	389	120	240	Φ50-8P *	FP-2A
WFDF-662, CBSFDF-662	760	482	120	240	Φ50-8P *	FP-2A
WFDF-662, CBSFDF-662	760	530	120	240	Φ50-8P *	FP-2A

* Square Thread

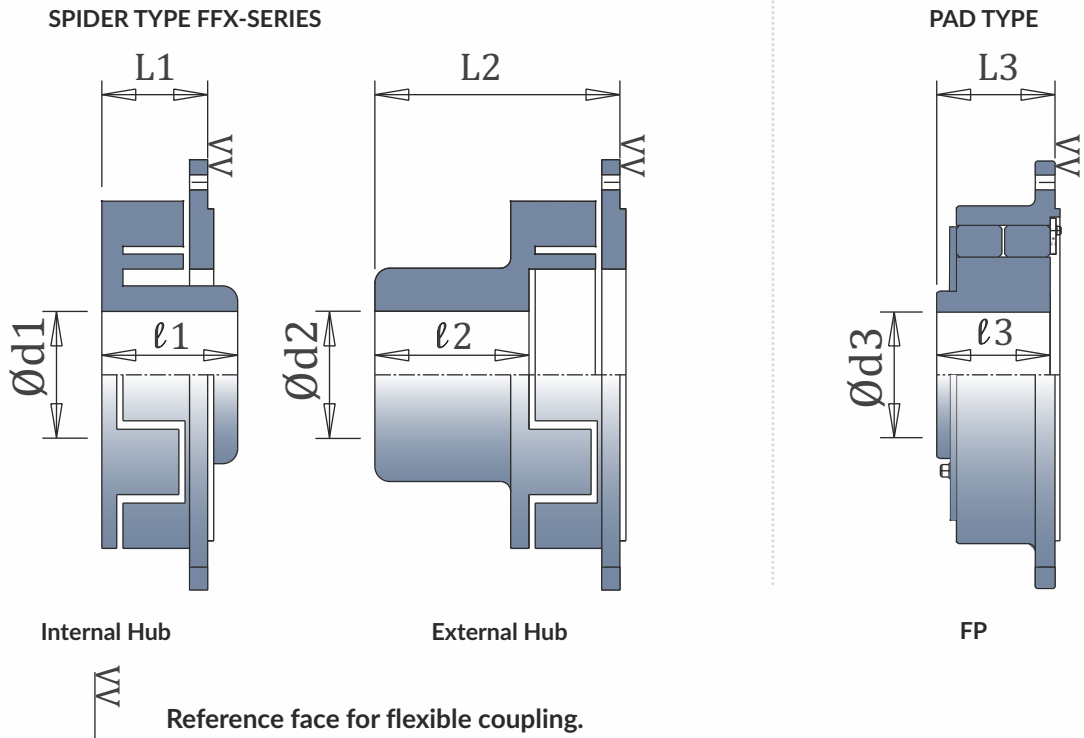

Flexible Coupling Model	Internal Hub			External Hub			Pad type coupling		
	Ø d1 max	ℓ1	L1	Ø d2 max	ℓ2	L2	Ø d3 max	ℓ3	L3
FFX-1	42	67	67	60	75	130	--	--	--
FFX-3	80	92	72	90	110	170	--	--	--
FFX-4	90	102	87	100	120	195	--	--	--
FFX-5	140	106	106	125	150	230	--	--	--
FP-1	--	--	--	--	--	--	105	110	120
FP-2	--	--	--	--	--	--	140	140	151

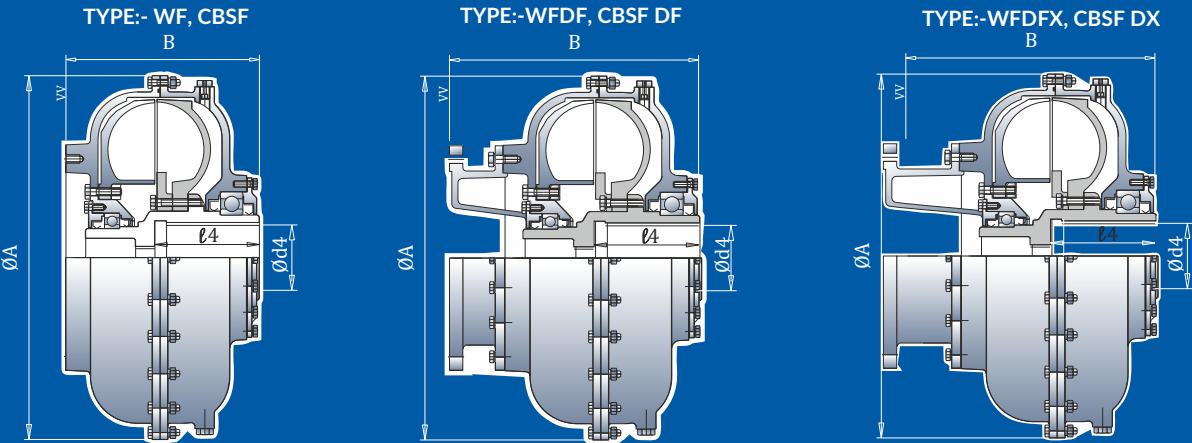

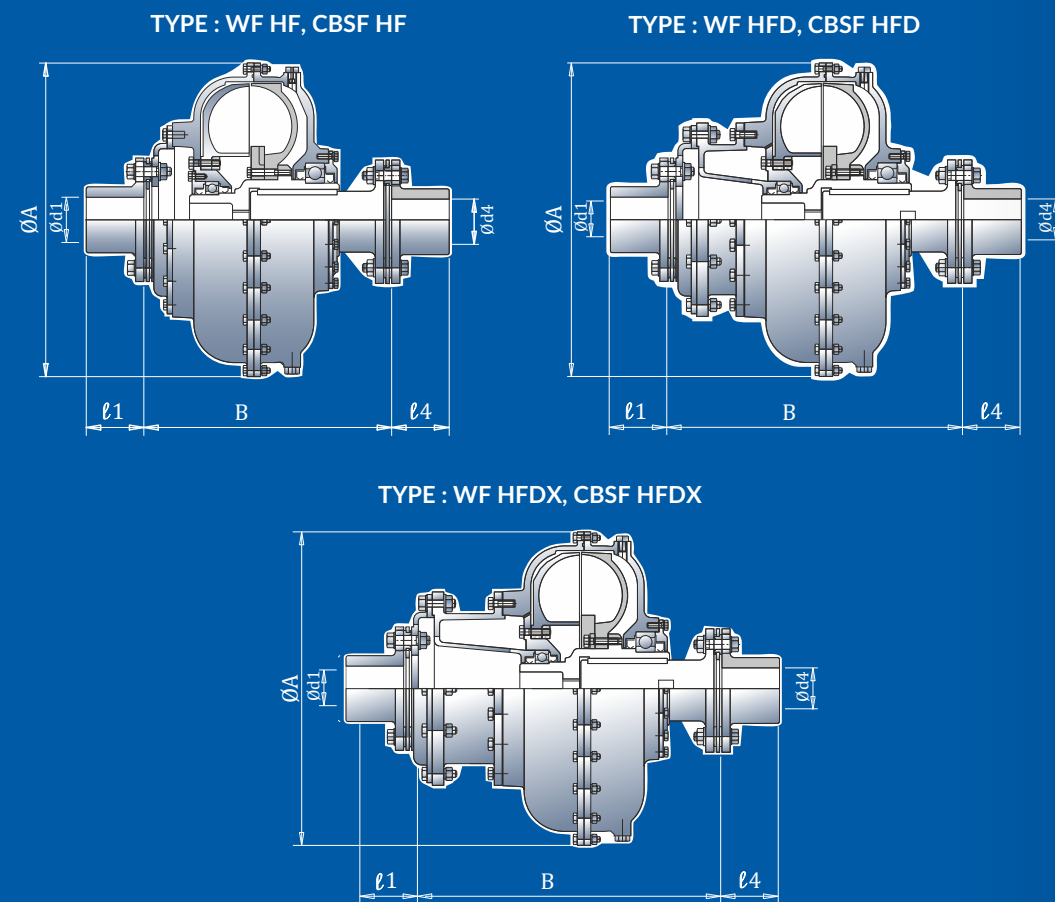

Type WF HF & CBSF HF are radially displaceable fluid couplings with metallic disc flexible coupling on both input and output ends. These metallic disc couplings do not require any lubrication and require least maintenance. The weight of fluid coupling is shared by motor and driven machine shaft thus reducing weight reaction on gear box shafts which are of small diameters in modern designs.

Technical Specification and Dimension Table For WFHF & CBSFHF

Fluid Coupling Model	ø A	B	ø d 1 max	l1	ø d 4 max	l4	Flex Coupling Model FXC
WFHF-4, CBSFHF-4	380	278	55	70	55	70	FXC-II
WFHFD-4, CBSFHFD-4	380	364	55	70	55	70	FXC-II
WFHF-360, CBSFHF-6	418	350	75	95	75	95	FXC-III A
WFHFD-360, CBSFHFD-6	418	446	75	95	75	95	FXC-III A
WFHF-5, CBSFHF-7	470	378	75	95	75	95	FXC-III A
WFHFD-5, CBSFHFD-7	470	465	75	95	75	95	FXC-III A
WFHF-6, CBSFHF-8	512	384	95	110	95	110	FXC-III
WFHFD-6, CBSFHFD-8	512	458	95	110	95	110	FXC-III
WFHFDX-6, CBSFHFDX-8	512	504	95	110	95	110	FXC-III
WFHF-7, CBSFHF-9	570	402	95	110	95	110	FXC-III
WFHFD-7, CBSFHFD-9	570	480	95	110	95	110	FXC-III
WFHFDX-7, CBSFHFDX-9	570	502	95	110	95	110	FXC-III
WFHF-8, CBSFHF-10	620	470	120	125	120	125	FXC-IV A
WFHFD-8, CBSFHFD-10	620	550	120	125	120	125	FXC-IV A
WFHFDX-8, CBSFHFDX-10	620	630	120	125	120	125	FXC-IV A
WFHF-566, CBSFHF-566	644	500	120	125	120	125	FXC-IV A
WFHFD-566, CBSFHFD-566	644	578	120	125	120	125	FXC-IV A
WFHFDX-566, CBSFHFDX-566	644	659	120	125	120	125	FXC-IV A
WFHF-9, CBSF HF-11	715	528	120	125	120	125	FXC-IV A
WFHFD-9, CBSF HFD-11	715	586	120	125	120	125	FXC-IV A
WFHFDX-9, CBSF HFDX-11	715	669	120	125	120	125	FXC-IV A
WFHF-662, CBSFHF-662	760	604	150	200	150	200	FXC-V
WFHFD-662, CBSFHFD-662	760	689	150	200	150	200	FXC-V
WFHFDX-662, CBSFHFDX-662	760	745	150	200	150	200	FXC-V

SPECIFICATION OF OIL

Equivalent Oil Grades and Brands as per ISOVG 32

Brand	Viscosity C.St @ 40°C	Viscosity Index (In°C)	Flash Point (In °c)	Pour Point (Min) (In °c)
HP ENCLO 32	32	95	190	(-) 3
HP-ENCLO VT 32	32	109	224	(-) 37
IOC- SERVOSYSTEM 32	29-33	95	190	(-) 6
IOC- SERVOSYSTEM HLP 32	29-33	100	200	(-) 21
SHELL TELLUS 32	32	99	209	(-) 30
CASTROL HYPH-AWH 32	32	95	180	(-) 3
BPL HYDROIL HLP 32	29-35	95	185	(-) 18

Other Equivalent Brands

Brand	Designation	Flash Point (In °c)
BP	BP- Energol HLP-32	216
CASTROL	Hyspin 32	220
CHEVRON	Mechanism LPS-32	200
ESSO	Esso Torque Fluid	220
MOBIL	Mobil Fluid 32	225
SHELL	Tegula Oil 32	196
AGIP	AGIP Oso 32	204
FUCHS	Renolin MR10	210

Recommended Oil For Constant Fill Fluid Couplings.

For Fire Resistant Hydraulic Fluids ►

VISCOSITY (at 40° C) : 40 - 44 cst
FIRE POINT ≥ 368° C
FLASH POINT ≥ 254° C

Shell Turbo DR46/Fuchs Phosphocent 246
Anvol PE 46 XC/Equivalent.

IOC - Servofyress 46
HP - Enklo FRDu 46
Castrol - Anvol PE46Xc

For Oil Filled Couplings ►

AS PER ISOVG - 32 HLP Grade
VISCOSITY : 32 @ 40°C
FLASH POINT ≥ 190°C

ISOVG 32 Specifications
Viscosity 29-33 Cst
Viscosity 95 Min.
Flash Point ≥ 190°C
Pour Point (-) 30 to (-) 37° C

MASS MOMENT OF INERTIA, 'J'

WITH OIL IN KG M²

Model	Outer wheel	Inner wheel
SM-3	0.22	0.04
SM-4	0.33	0.06
SM-5	0.68	0.21
SM-6	0.89	0.24
SM-7	1.32	0.34
SM-8	1.72	0.37
SM8-B	2.40	0.64
SM-9	2.82	0.75
SM-9B	4.65	1.53
SM-10	5.01	1.72
SM-10B	10.15	2.90
SM-11	11.66	3.41
SM-12	18.30	5.56
SM-13	35.74	12.22
SM-14	61.55	21.70
SM-15	93.13	33.70

Model	Outer wheel	Inner Wheel
SMDX-3	0.24	0.04
SMDX -4	0.36	0.06
SMDX -5	0.74	0.21
SMDX -6	1.04	0.24
SMDX -7	1.59	0.34
SMDX-8	1.96	0.39
SMDX-8B	2.76	0.67
SMDX -9	3.24	0.78
SMDX-9B	5.55	1.58
SMDX-10	7.04	1.79
SMDX-10B	12.30	3.00
SMDX -11	14.07	3.55
SMDX -12	21.93	5.86
SMDX -13	43.02	12.75
SMDX-14	73.14	22.56
SM DX-15	110.70	35.07

Model	Outer wheel	Inner Wheel
SMD-3	0.23	0.04
SMD-4	0.35	0.06
SMD-5	0.71	0.21
SMD-6	0.97	0.24
SMD-7	1.47	0.34
SMD-8	1.85	0.39
SMD-8B	2.61	0.67
SMD-9	3.06	0.78
SMD-9B	5.09	1.58
SMD-10	6.07	1.79
SMD-10B	11.30	3.00
SMD-11	12.97	3.55
SMD-12	20.33	5.86
SMD-13	39.82	12.75
SMD-14	68.04	22.56
SMD-15	102.70	35.07
SMD -16	162.00	54.10

Model	*Outer wheel	Inner Wheel
SMP-1	0.11	0.02
2	0.15	0.03
3	0.28	0.04
4	0.37	0.05
5	0.76	0.12
6	0.96	0.25
7	1.43	0.34
8	1.88	0.47
9	2.89	0.65
10	5.37	2.11
11	11.98	3.43

* Values for maximum size of direct mounting pulley.

MASS MOMENT OF INERTIA, 'J'

WITH OIL IN KG M²

Model	Outer Wheel	Inner Wheel
HF-3	0.25	0.05
HF-4	0.39	0.07
HF-5	0.66	0.23
HF-6	0.69	0.29
HF-7	1.32	0.35
HF-8	1.72	0.49
HF-8B	2.40	0.64
HF-9	2.82	0.76
HF-9B	4.65	1.91
HF-10	5.01	2.11
HF-10B	10.15	3.34
HF-11	11.66	3.93
HF-12	18.30	7.31
HF-13	35.74	14.25
HF-14	61.46	24.10
HF-15	93.13	37.24

Model	Outer Wheel	Inner Wheel
HFD-3	0.26	0.05
HFD-4	0.41	0.07
HFD-5	0.71	0.24
HFD-6	0.97	0.30
HFD-7	1.46	0.40
HFD-8	1.85	0.51
HFD-8B	2.61	0.72
HFD-9	3.06	0.93
HFD-9B	5.09	1.96
HFD-10	6.07	2.18
HFD-10B	11.30	3.44
HFD-11	12.97	4.07
HFD-12	20.33	7.61
HFD-13	39.82	14.78
HFD-14	68.04	24.98
HFD-15	102.70	38.61
HFD-16	-	-


Model	Outer wheel	Inner wheel
HFDX-3	0.27	0.05
HFDX-4	0.42	0.07
HFDX-5	0.74	0.24
HFDX-6	1.04	0.30
HFDX-7	1.59	0.40
HFDX-8	1.96	0.51
HFDX-8B	2.76	0.72
HFDX-9	3.24	0.93
HFDX-9B	5.55	1.96
HFDX-10	7.04	2.18
HFDX-10B	12.30	3.44
HFDX-11	14.07	4.07
HFDX-12	21.93	7.61
HFDX-13	43.02	14.78
HFDX-14	73.14	24.98
HFDX-15	-	-

Model	Outer wheel	Inner wheel
T12-01	0.11	0.02
02	0.15	0.03
03	0.19	0.04
04	0.27	0.05
05A	0.57	0.12
05	0.78	0.25
06	1.32	0.34
07	1.72	0.47
08	2.44	0.65
08B	4.11	1.69
09	5.01	2.11
010A	8.57	2.82
010	10.18	3.43
011	20.95	8.37
012	35.74	14.25
013	61.35	24.10
014	93.13	37.24

MOTOR CHARACTERISTIC CURVE



QUICK DECAY OF MOTOR CURRENT WITH FLUID COUPLING

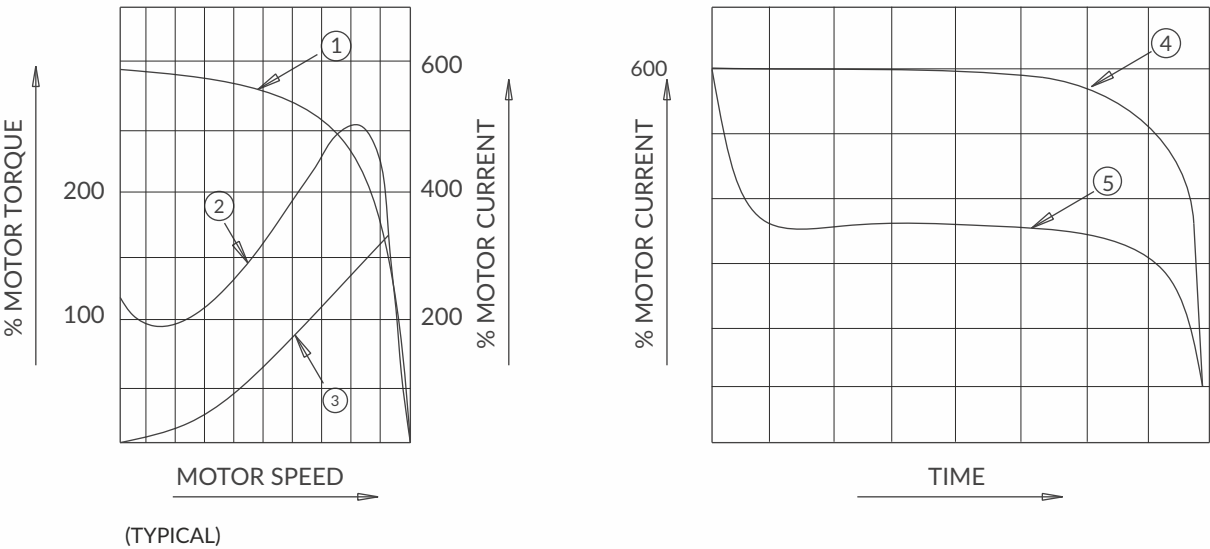


- 1. MOTOR CURRENT
- 2. MOTOR TORQUE
- 3. FLUID COUPLING TORQUE AT 100% SLIP
- 4. MOTOR CURRENT WITHOUT FLUID COUPLING
- 5. MOTOR CURRENT WITH FLUID COUPLING

All Dimension in this catalogue are in mm unless specified otherwise.
Note: Due to continuous improvements the specifications may change without notice.



The operating temperature of MTP is as under:

MTP SETTING	FUSIBLE PLUG MELTING TEMPERATURE
< 110 °c	130 °c ± 5 °c
< 140 °c	160 °c ± 5 °c

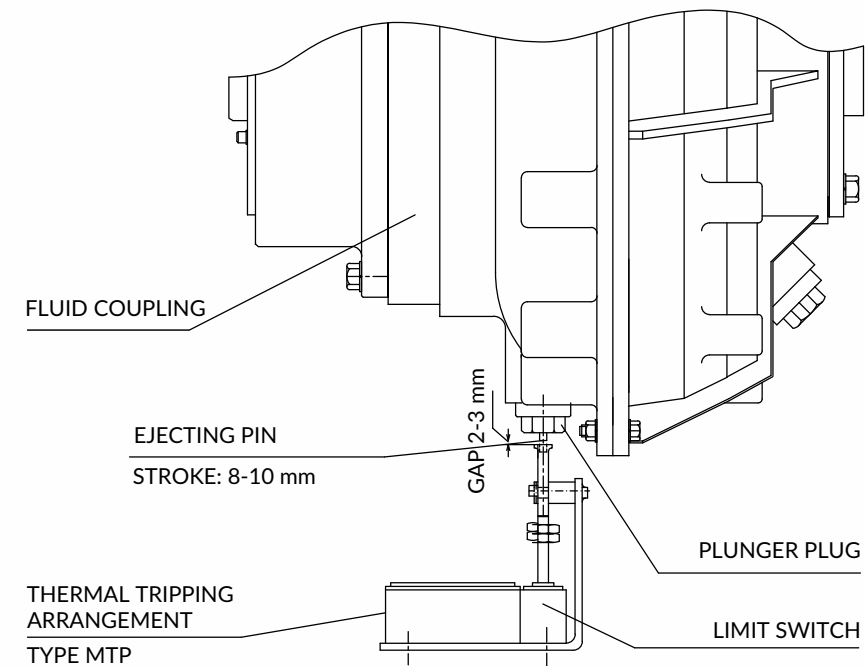

MTP SYSTEM

1. FUSIBLE PLUG: In case of over heating of the coupling, the fusible plug provided on the coupling melts and oil filled in the coupling is drained off and thus power transmission through the coupling is stopped.

Coupling should not be run more than 60 seconds after fusible plug has melted and oil is drained. Suitable guard must be provided so that the hot oil spray is restricted within the guard.

2. THERMAL TRIPPING ARRANGEMENT: MTP is a mechanical Thermal Switch. In order to avoid loss of operating fluid due to over heating of fluid coupling the mechanical Thermal Switch MTP can be added. However fusible plug with higher response temperature remains on the fluid coupling.

MTP consist of a plunger plug screwed on the fluid coupling body. A cam with limit switch are mounted on stationary base frame.

On exceeding the set temperature, the plunger plug ejects out a pin which hits the cam and operates the limit switch contact (make or break). Depending on the circuit selected the limit switch signal can be used to switch off the drive motor or activate audio/visual alarm.

The plunger plug has to be replaced after activation.

MTP system provides valuable safety and environment protection by avoiding spillage and loss of expensive operating fluid. Spillage of operating fluid can be expensive fire and accident hazard due to slippery floors and injury to workmen.

NON CONTACT ONLINE TEMPERATURE MONITOR
WITH DISPLAY AND RELAY OUTPUT

TYPE- IRNC:

The IRNC operates on Infrared pyrometer and consists of stationery infrared non-contact pyrometer and a precision temperature controller. The non-contact infrared sensor is placed in any direction within 50 mm from body of fluid couplings.

The heat emitted by the body is sensed by sensor and gives a voltage output which is processed in the base unit and gives relay output on exceeding preset temperature values.

IRNC systems provide valuable safety and environment protection by avoiding spillage and loss of expensive operating fluid and fire hazardous due to hot oil spray.

Suggested temperature settings an IRNC system:
IRNC Setting

Set Point Temp	Fusible Plug M e l t i n g
< 105 °c	130 °c ± 5 °c
< 135 °c	160 °c ± 5 °c

Fusible plug must be used along with the system as a backup protection.



ABOUT US

Fluidomat Ltd an ISO accredited company for ISO 9001-2015, ISO 14001-2015 & ISO 45001-2018 is manufacturing fluid couplings since 1971 in various types & executions. Various types include.

- Constant Fill fluid couplings in Aluminium & Steel body Oil filled & Water filled.
- Scoop Control Variable Speed fluid couplings type SC.
- Nozzle type fluid couplings.
 1. Type FNCT for Industrial & Mining drives.
 2. Type FNIC for IC Engine drives.

Fluidomat fluid couplings are used on more than 150 application in industrial, mining & automotive application.

Approved by all consultants, EPC companies & OEM internationally. More than 600 clients all over the world.

